

# hydraulic blind rivet setting tools

## TAURUS 4



Part no. 759 0001

### Working range

Blind rivets up to 6,4 mm Ø all materials and up to 8 mm Ø alu (max. mandrel dia. 4,5 mm)

### Technical data

|                         |                        |
|-------------------------|------------------------|
| Weight:                 | 2,0 kg                 |
| Operating air pressure: | 5-7 bar                |
| Air hose connection:    | 6 mm Ø (1/4")          |
| Air consumption:        | ca. 4,8 ltr. per cycle |
| Traction power:         | 20.000 N at 5 bar      |
| Stroke:                 | 19 mm                  |

### Nosepieces/accessories

Nosepieces:  
17/36 (in working position)  
17/40, 17/45 (in tool bottom)  
Maintenance wrench SW12/14, SW14/17  
1 oil bottle 100 ml  
1 oil refill can  
Operating instructions with spare parts list

## TAURUS 5



Basic tool  
Part no. 760 0001

### Working range

Blind rivets from 6,4 mm Ø all materials , Lockbolts up to 10 mm Ø with corresponding pulling heads

### Technical data

|                         |                        |
|-------------------------|------------------------|
| Weight:                 | 3,4 kg                 |
| Operating air pressure: | 5-7 bar                |
| Air hose connection:    | 6 mm Ø (1/4")          |
| Air consumption:        | ca. 6,9 ltr. per cycle |
| Traction power:         | 42.000 N at 7 bar      |
| Stroke:                 | 17 mm                  |

### Equipment/accessories

1 oil bottle 100 ml  
1 oil refill can  
Operating instructions and spare parts list

## TAURUS 6



Basic tool  
Part no. 761 0002

### Working range

Blind rivets from 6,4 mm Ø all materials, Lockbolts up to 10 mm Ø with corresponding pulling heads

### Technical data

|                         |                        |
|-------------------------|------------------------|
| Weight:                 | 3,4 kg                 |
| Operating air pressure: | 5-7 bar                |
| Air hose connection:    | 6 mm Ø (1/4")          |
| Air consumption:        | ca. 6,9 ltr. per cycle |
| Traction power:         | 50.000 N at 7 bar      |
| Stroke:                 | 15 mm                  |

### Equipment/accessories

1 oil bottle 100 ml  
1 oil refill can  
Operating instructions with spare parts list

## Small jaw assembly for TAURUS 1 and 2



for **TAURUS 1**  
Part no. 756 1120

for **TAURUS 2**  
Part no. 757 1077


### Operating range

- All alu/steel blind rivets up to Ø 5mm and steel/steel up to Ø 4mm with **TAURUS 1** and **2**
- Very much suitable for recessed riveting locations

### Technical data

|          |        |
|----------|--------|
| Length : | 100 mm |
| Head Ø:  | 18 mm  |

## Head modules for TAURUS 5 & 6

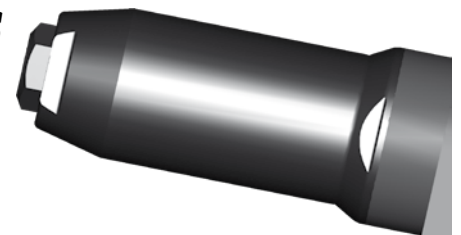

Head modules for 7,8 mm TITGEMEYER TIBULB®\*  
Part no. 760 0201

Head modules for 9,8 mm Huck Magna-Lok®\*  
Part no. 760 0202

Further head modules

on request

### Versatility as highest priority

The **TAURUS 5** and **6** riveting tools must be adapted to the different kinds of blind rivets and lockbolts through specific pulling head modules.

\* Registered trademarks of the companies TITGEMEYER GmbH & Co. KG and Alcoa Fastening Systems